



SPIRAL COUPLING

Features:

- Anodise aluminum & stainless steel construction.
- Zero Backlash
- High Torque.
- Low Moment of Inertia.

Housing Material:



Amodized Aluminium, S. S., M. S. & PVC Plastics.

Available Dimension:

Sr. No.	OD	Flange Bore Size	Spiral Bore size	Length
1	20mm	3 to 6 mm	3 to 6mm	20 to 40mm
2	25mm	3 to 10 mm	3to12mm	25 - 40mm
3	28mm	5 to 13mm	5 to12 mm	30-40mm
4	30mm	6 to 13 mm	6 to 16 mm	30 - 45mm
5	32mm	6 to 14 mm	6 to 17mm	32 -45mm
6	35mm	6 to 16mm	6 to 18mm	35-50mm
7	38mm	6 to19mm	6 to 20mm	35 - 50mm
8	40mm	6 to20mm	6 to 22mm	40-50mm
10	60mm	24 to 30mm	24 to 35mm	40-80mm



AF TYPE (FLANGE TYPE)

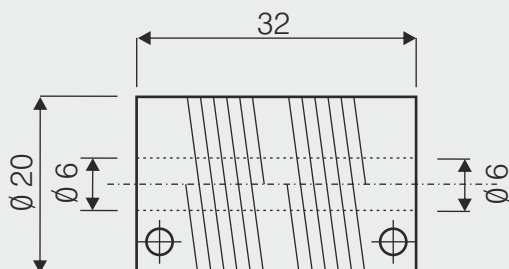

AS TYPE (SCREW TYPE)

